



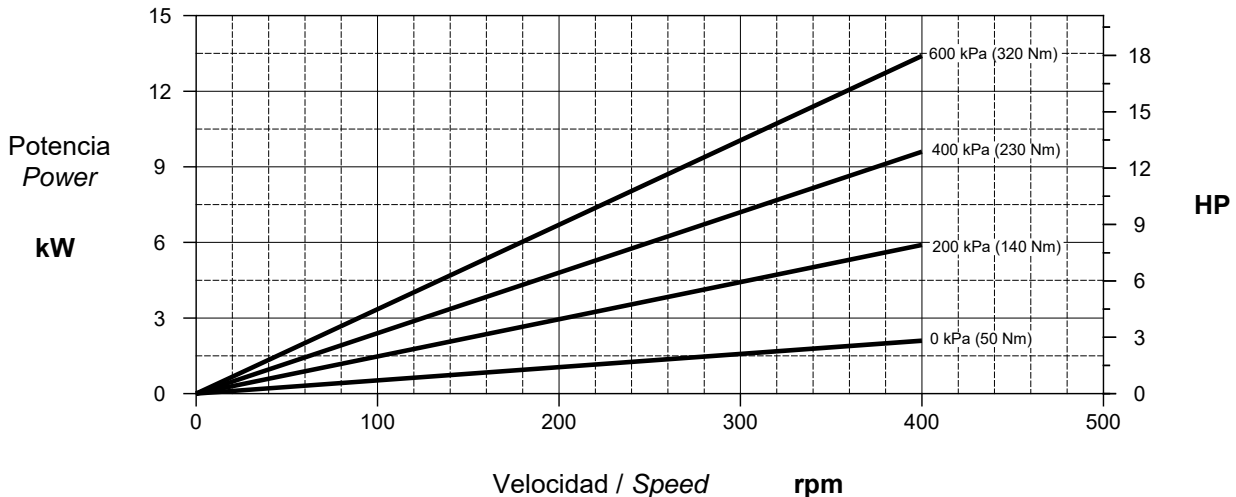

CURVAS CARACTERÍSTICAS  
PERFORMANCE CURVES

Material estátor / Stator material <b>NBR</b>	Ø Boca asp. / Pump inlet <b>Tolva / Hopper</b>	Bomba / Pump <b>KTE-90</b>
Dureza estátor / Stator hardness <b>55 ±3 Shores</b>	Ø Boca imp. / Pump outlet <b>DN-120</b>	
Par mín. arranque / Min. starting torque <b>190 Nm (140 lbt.ft)</b>	Esfera máx. recom. / Max. sphere recom. <b>Ø23 mm</b>	Etapas / Stages <b>1</b>

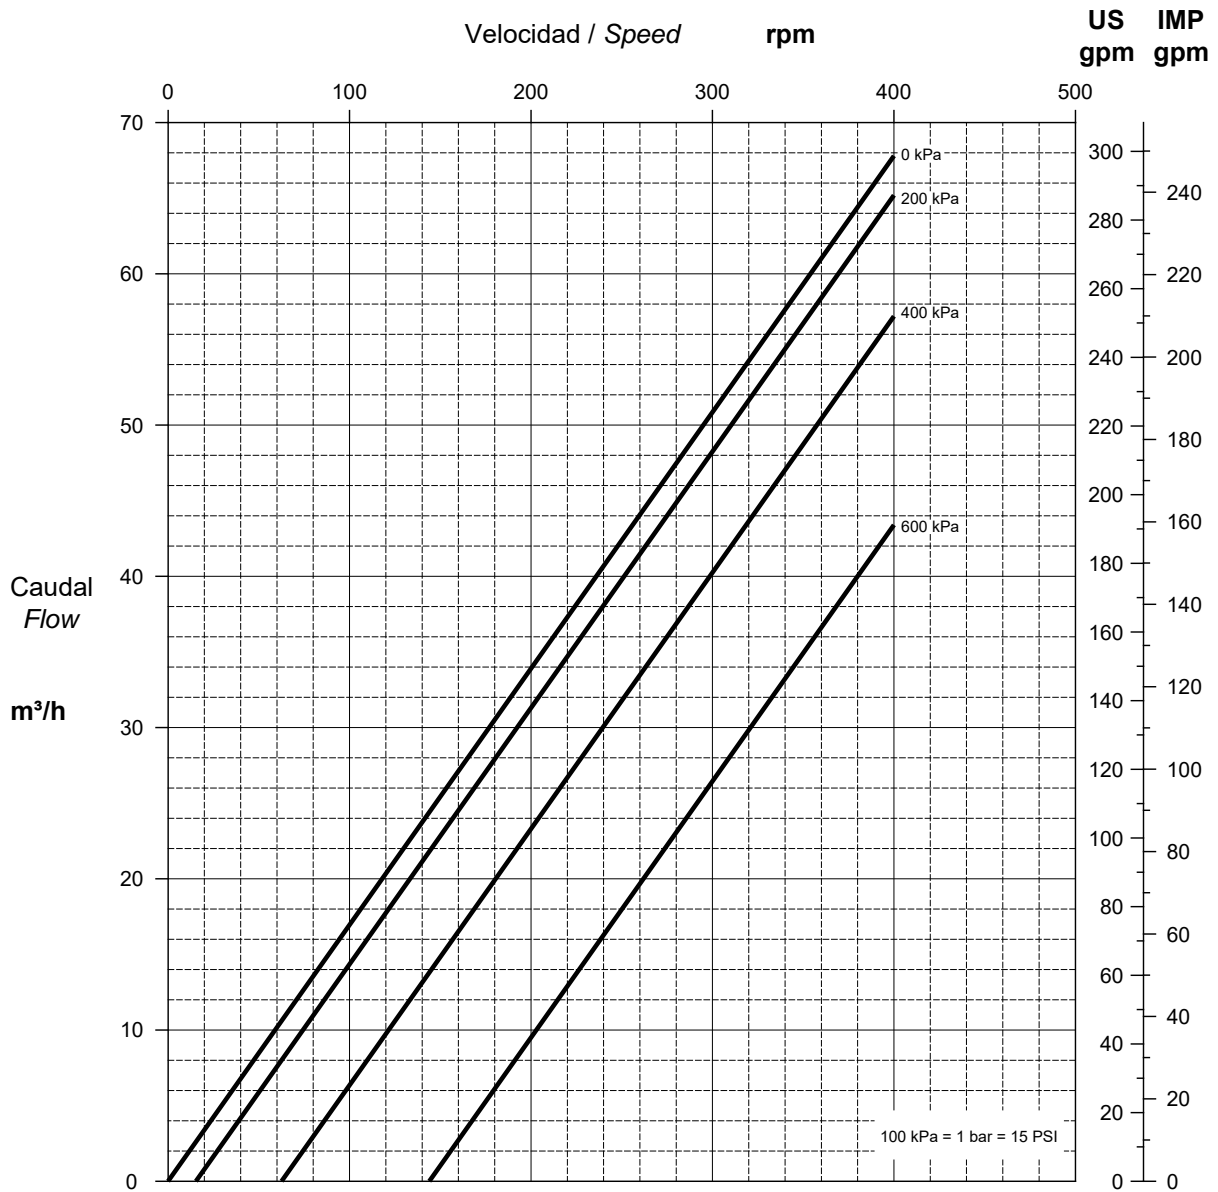

Los datos hacen referencia a agua limpia a 20°C / Performance data refer to clear water at 20°C

Tolerancia según ISO 9906:1999 Anexo A / Permissible tolerance ISO 9906:1999 Annex A